


## **LIFTER PLATE INSTALLATION LOCATION - FRONT AND BACK BRACKETS**

Cover lifters that attach directly into the spa cover require internal reinforcement plates to be installed. Examples of this removal system are the Leisure Concepts Covermate Vanish, as well as various lift systems made by Watkins Mfg for their Hot Spring, Tiger River, Limelight, Hot Spot and Caldera lines of hot tubs.

Please fill out the form below to communicate to us where to place the internal brackets. Brackets are only installed on one side of the spa cover.

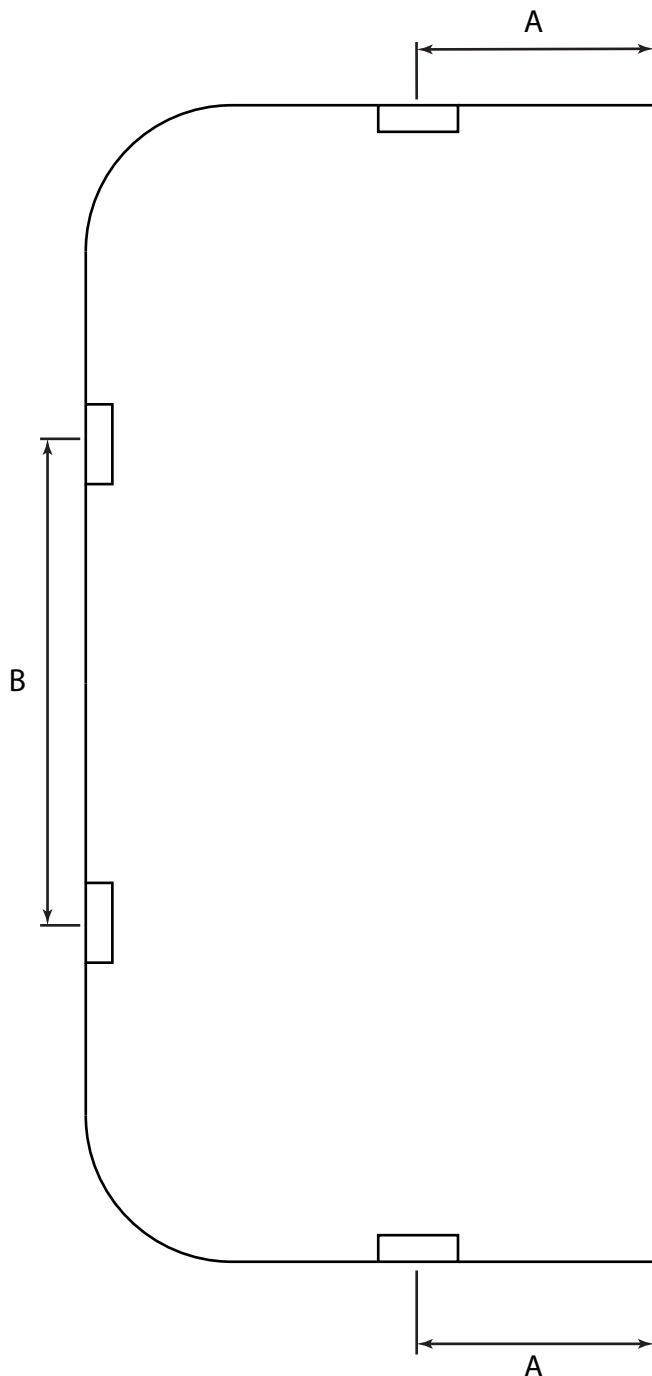

### **A MEASUREMENT**

The A measurement shown in the image to the left is the measurement from the hinge to the center of the side bracket location. Please measure from the hinge of the cover to the CENTER of the cover lift bracket. We will center our 6" long internal bracket.

**A** = \_\_\_\_\_ "

### **B MEASUREMENT**

The B measurement shown in the image to the left are the rear bracket locations. They are equidistant from the center of the spa cover. IT IS IMPORTANT TO LET US KNOW IF THESE ARE NOT EQUIDISTANTLY CENTERED ON THE COVER.

Please measure from the CENTER of one rear cover lift bracket to the other's CENTER. B represents the distance between the two rear brackets.

**B** = \_\_\_\_\_ "

### **PLEASE NOTE:**

It is important to note the following:

- Covers must be equipped with either 5"x3" or 6"x4" tapered foam. We cannot install brackets in 4"x2" foam.
- This is a service, not a DIY kit. We will install the internal reinforcement brackets directly into the foam, inside the vapor barrier. You will not be required remove the foam cores and reassemble the cover to complete installation.
- Installation requires you to pre-drill through our aluminum brackets with a bit smaller than the screw that holds the exterior bracket in place.
- Final installation requires that the screws that hold the exterior bracket to the internal reinforcement bracket to go through the outer covering jacket of the cover and through the vapor barrier. All immediate and resulting damage caused by the use of any cover removal system, the type described herein or otherwise, is expressly excluded from your spa cover's warranty coverage.

## **ORDER INFORMATION**

CUSTOMER NAME: \_\_\_\_\_ TAG: \_\_\_\_\_

ORDER NUMBER: \_\_\_\_\_ DATE: \_\_\_\_\_